


# DATA SHEET SYSTEM PANELS



www.schuetz.net

## Tacker panel system ultra-takk PRO EPS-T 20-2 with adhesive strip Article no. 4029022

HBCD-free

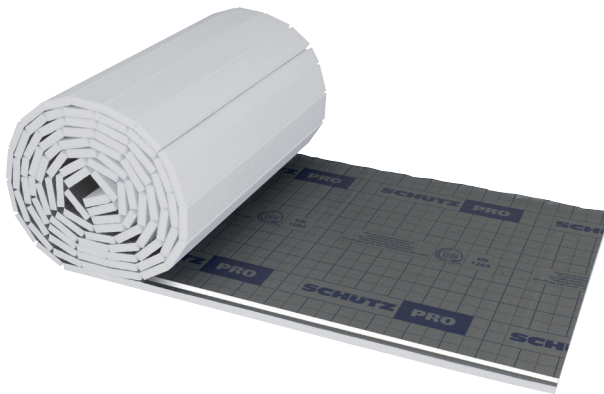

### Standards:

DIN EN 13163  
DIN EN 1264  
Z-23.15-1479

### Monitoring:

1. In-house monitoring
2. FIW, Munich (DIN EN 13163)

### Configuration:

- Polystyrene DES sg  
(Austrian Standard B 6000:EPS-T 650)  
EPS-EN 13163-L3-W3-TC(0)-S5-P3-  
BS50-DS(N)5-SD30-CP2  
DOP: L1-96/2003
- Adhesive
- Plastic coating with interwoven fibres  
and grid pattern (5 cm)

### TECHNICAL DATA

Packaging unit	10.0 m <sup>2</sup> /roll
Panel size	1,000 x 10,000 mm
Longitudinal upper layer overlap	30 mm
Panel thickness d <sub>L-c</sub>	18 mm
Thermal conductivity $\lambda_D$	0.044 W/mK
Thermal resistance R <sub>D</sub> acc. to DIN EN 1264	0.46 m <sup>2</sup> K/W
Dynamic stiffness	SD 30
Max. load capacity acc. to DIN EN 13163	5 kPa
Max. load capacity acc. to Austrian Standard B 6000	650 kg/m <sup>2</sup>
Impact sound reduction $\Delta L_{w,R}$ where m' = 120 kg/m <sup>2</sup> acc. to DIN 4109-34: 2016-07	27 dB
Fire behaviour RtF	E (EN 13501-1)
Building material class acc. to DIN 4102-1	B 2


# DATA SHEET SYSTEM PANELS



www.schuetz.net

## Tacker panel system ultra-takk PRO EPS-T 25-2 with adhesive strip Article no. 4029021

HBCD-free

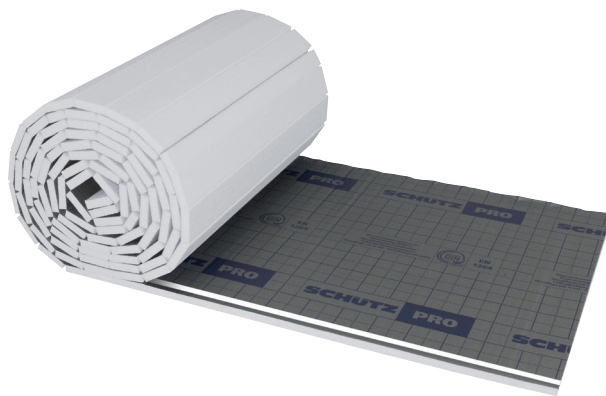

### Standards:

DIN EN 13163  
DIN EN 1264  
Z-23.15-1479

### Monitoring:

1. In-house monitoring
2. FIW, Munich (DIN EN 13163)

### Configuration:

- Polystyrene DES sg  
(Austrian Standard B 6000:EPS-T 650)  
EPS-EN 13163-L3-W3-TC(0)-S5-P3-  
BS50-DS(N)5-SD20-CP2  
DOP: L1-96/2003
- Adhesive
- Plastic coating with interwoven fibres  
and grid pattern (5 cm)

### TECHNICAL DATA

Packaging unit	10.0 m <sup>2</sup> /roll
Panel size	1,000 x 10,000 mm
Longitudinal upper layer overlap	30 mm
Panel thickness d <sub>L-c</sub>	23 mm
Thermal conductivity λ <sub>D</sub>	0.044 W/mK
Thermal resistance R <sub>D</sub> acc. to DIN EN 1264	0.57 m <sup>2</sup> K/W
Dynamic stiffness	SD 20
Max. load capacity acc. to DIN EN 13163	5 kPa
Max. load capacity acc. to Austrian Standard B 6000	650 kg/m <sup>2</sup>
Impact sound reduction ΔL <sub>w,R</sub> where m' = 120 kg/m <sup>2</sup> acc. to DIN 4109-34: 2016-07	29 dB
Fire behaviour RtF	E (EN 13501-1)
Building material class acc. to DIN 4102-1	B 2


# DATA SHEET SYSTEM PANELS



www.schuetz.net

## Tacker panel system ultra-takk PRO EPS-T 30-2 with adhesive strip Article no. 4032238

HBCD-free

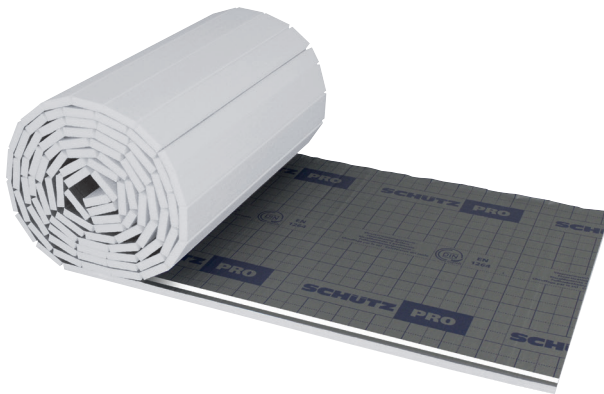

### Standards:

DIN EN 13163  
DIN EN 1264  
Z-23.15-1479

### Monitoring:

1. In-house monitoring
2. FIW, Munich (DIN EN 13163)

### Configuration:

- Polystyrene DES sg  
(Austrian Standard B 6000:EPS-T 650)  
EPS-EN 13163-L3-W3-TC(0)-S5-P3-  
BS50-DS(N)5-SD30-CP2  
DOP: L1-96/2003
- Adhesive
- Plastic covering layer with woven tape  
and 5 cm grid print as screed moisture  
protection

### TECHNICAL DATA

Packaging unit	10.0 m <sup>2</sup> /roll
Panel dimensions	1,000 x 10,000 mm
Longitudinal upper layer overlap	30 mm
Panel thickness d <sub>L-c</sub>	28 mm
Thermal conductivity λ <sub>D</sub>	0.039 W/mK
Thermal resistance R <sub>D</sub> acc. to DIN EN 1264	0.77 m <sup>2</sup> K/W
Dynamic stiffness	SD 30
Max. load capacity acc. to DIN EN 13163	5 kPa
Max. load capacity acc. to Austrian Standard B 6000	650 kg/m <sup>2</sup>
Impact sound reduction ΔL <sub>w,R</sub> where m' = 120 kg/m <sup>2</sup> acc. to DIN 4109-34: 2016-07	27 dB
Fire behaviour RtF	E (EN 13501-1)
Building material class acc. to DIN 4102-1	B 2


# DATA SHEET SYSTEM PANELS



www.schuetz.net

## Tacker panel system ultra-takk PRO EPS-T 30-3 with adhesive strip Article no. 4028087

HBCD-free

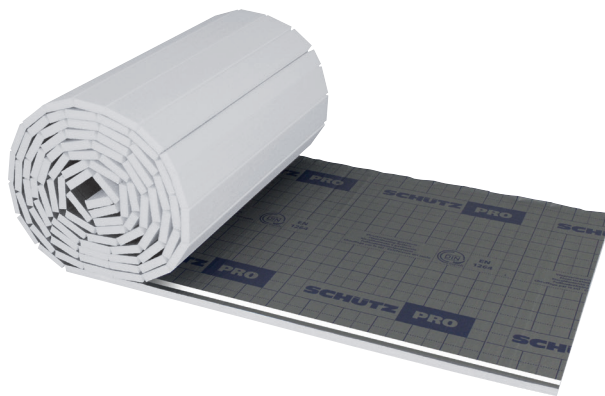

### Standards:

DIN EN 13163  
DIN EN 1264  
Z-23.15-1479

### Monitoring:

1. In-house monitoring
2. FIW, Munich (DIN EN 13163)

### Configuration:

- Polystyrene DES sm  
(Austrian Standard B 6000: EPS-T 650)  
EPS-EN 13163-L3-W3-TC(0)-S5-P3-  
BS50-DS(N)5-SD20-CP3  
DOP: L1-96/2003
- Adhesive
- Plastic coating with interwoven fibres  
and grid pattern (5 cm)

### TECHNICAL DATA

Packaging unit	10.0 m <sup>2</sup> /roll
Panel size	1,000 x 10,000 mm
Longitudinal upper layer overlap	30 mm
Panel thickness d <sub>L-c</sub>	27 mm
Thermal conductivity λ <sub>D</sub>	0.044 W/mK
Thermal resistance R <sub>D</sub> acc. to DIN EN 1264	0.68 m <sup>2</sup> K/W
Dynamic stiffness	SD 20
Max. load capacity acc. to DIN EN 13163	4 kPa
Max. load capacity acc. to Austrian Standard B 6000	650 kg/m <sup>2</sup>
Impact sound reduction ΔL <sub>w,R</sub> where m' = 120 kg/m <sup>2</sup> acc. to DIN 4109-34: 2016-07	29 dB
Fire behaviour RtF	E (EN 13501-1)
Building material class acc. to DIN 4102-1	B 2


# DATA SHEET SYSTEM PANELS



www.schuetz.net

## Tacker panel system ultra-takk PRO EPS-T 35-3 with adhesive strip Article no. 4032237

HBCD-free

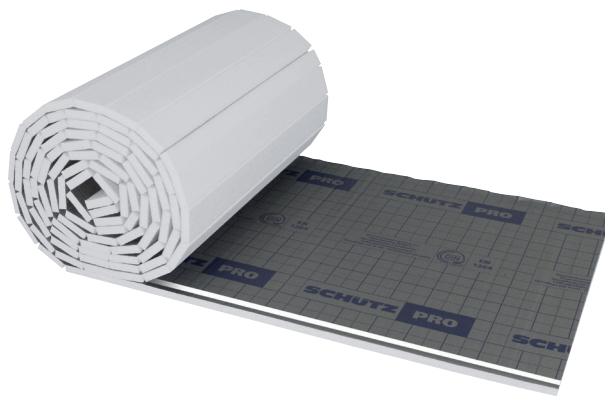

### Standards:

DIN EN 13163  
DIN EN 1264  
Z-23.15-1479

### Monitoring:

1. In-house monitoring
2. FIW, Munich (DIN EN 13163)

### Configuration:

- Polystyrene DES sm  
(Austrian Standard B 6000: EPS-T 650)  
EPS-EN 13163-L3-W3-TC(0)-S5-P3-BS50-  
DS(N)5-SD15-CP3  
DOP: L1-96/2003
- Adhesive
- Plastic covering layer with woven tape  
and 5 cm grid print as screed moisture  
protection

### TECHNICAL DATA

Packaging unit	10.0 m <sup>2</sup> /roll
Panel size	1,000 x 10,000 mm
Longitudinal upper layer overlap	30 mm
Panel thickness d <sub>L-c</sub>	32 mm
Thermal conductivity λ <sub>D</sub>	0.044 W/mK
Thermal resistance R <sub>D</sub> acc. to DIN EN 1264	0.80 m <sup>2</sup> K/W
Dynamic stiffness	SD 15
Max. load capacity acc. to DIN EN 13163	4 kPa
Max. load capacity acc. to Austrian Standard B 6000	650 kg/m <sup>2</sup>
Impact sound reduction ΔL <sub>w,R</sub> where m' = 120 kg/m <sup>2</sup> acc. to DIN 4109-34: 2016-07	31 dB
Fire behaviour RtF	E (EN 13501-1)
Building material class acc. to DIN 4102-1	B 2